


Note:

1: V.S.W.R: 1.5(0~3G), Max.

2: Wire surface shall have no dirt, broken.

3: Connector surface with coating, oxidation phenomenon.

4: Connector pins and insulator are in the same plane

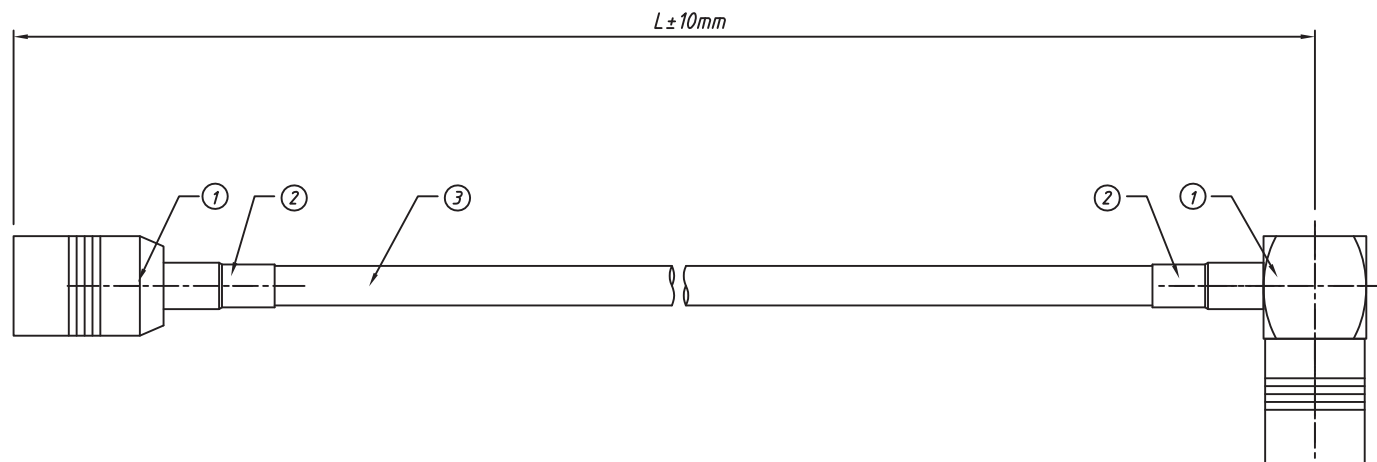

*SMB plug,Female to
SMB plug,Female R/A Cable*

4	Connector	SMB plug,Female Right angle ,for RG316/RG174	PCS	1
3	RF Cable	RG316 or RG178 Cable	mm	L
2	Heat-Shrink Tube	Ø2.5mm Heat-Shrink Tube,Block,L15mm	PCS	2
1	Connector	SMB plug,Female ,for RG316/RG174	PCS	1
No.	Name	Description	UNITS	Q'ty

General description of ordering code

FAMILY	LENGHT(L)	TYPE
SMBCAB	XXXX	SMBR

**euro-conn****UNITS:** mm**SHEET SIZE:** ISO A4**SCALE:** ----

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

RF COAXIAL CABLE