


**Note:**

1: V.S.W.R: 1.5(0 3G), Max.

2: Wire surface shall have no dirt, broken.

3: Connector surface with coating, oxidation phenomenon.

4: Connector pins and insulator are in the same plane

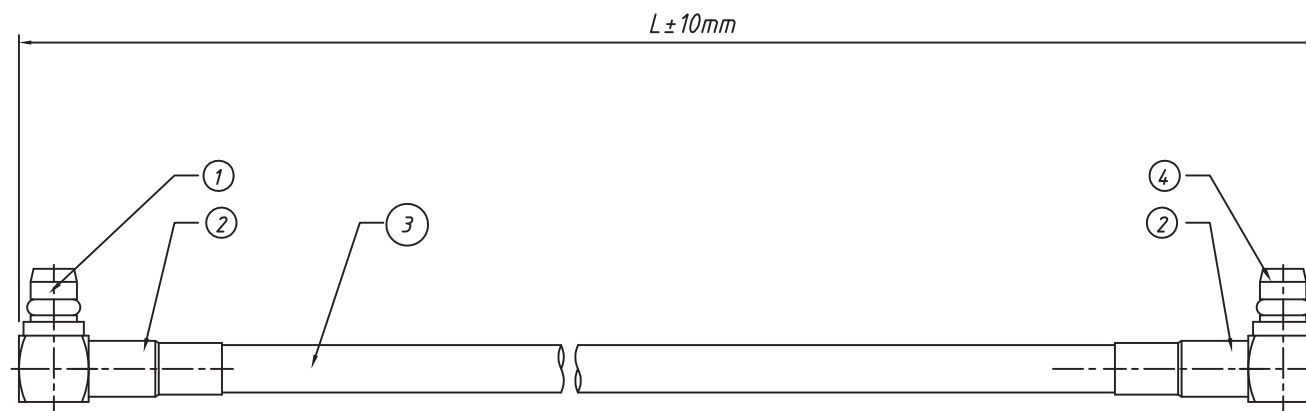

**MMCX Male R/A to MMCX Male R/A Cable**

4	Connector	MMCX Male Plug, Right angle, for RG174 or RG316	PCS	1
3	RF Cable	RG174 Cable, Black, OD2.7mm	mm	L
2	Heat-Shrink Tube	Ø2.5mm Heat-Shrink Tube, Black, L15mm	PCS	2
1	Connector	MMCX Male Plug, Right angle, for RG174 or RG316	PCS	1
No.	Name	Description	UNITS	Q'ty

**General description of ordering code**

FAMILY	LENGHT(L)	TYPE
MMCXRCAB	XXXX	MMCXR



**euro-conn**



**UNITS: mm**

**SHEET SIZE: ISO A4**

**SCALE: ----**

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.  
The products and their features may change without notice.

**RF COAXIAL CABLE**