

SPECIFICATIONS

Mechanical life: 2000 operations per switch

Operation Force : $\leq 9.8\text{N}$ max.

Stroke: 2.0mm

Operation Temp: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$

Electrical life: 2000 operations per switch-24 VDC, 25mA

Contact Resistance: 50m max. at initial


Non-Switching Rating: 100mA, 50VDC

Switching Rating: 25mA, 24VDC

Circuit: Single pole single throw

Soldering and Cleaning Processes

Keep all switch contacts in their "OFF" position for all operations

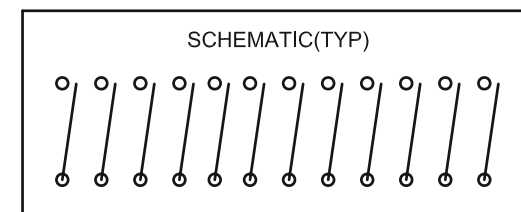

General description of ordering code

| FAMILY | POSITIONS | TYPE | VERSION | OPTION | PACKAGE |
|------------|-----------|------------|------------------------|----------------------|-----------------|
| EC7 | XX | KL | N [color black] | 0 [sealed] | T [tube] |
| | | KLR | | 1 [no sealed] | R [reel] |



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE: ----

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

DIP SWITCH