

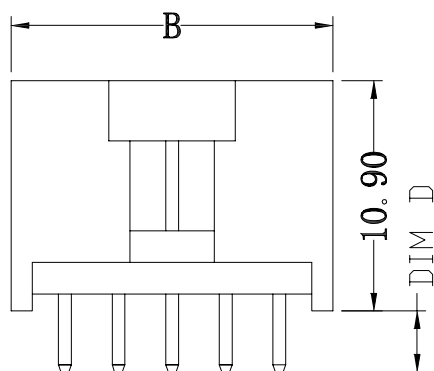
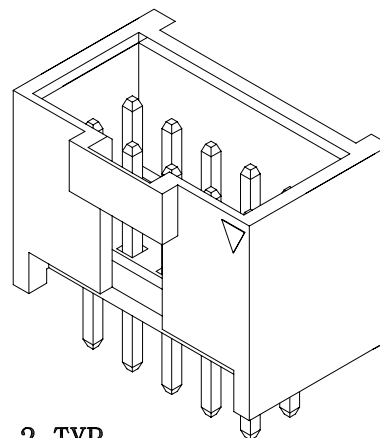
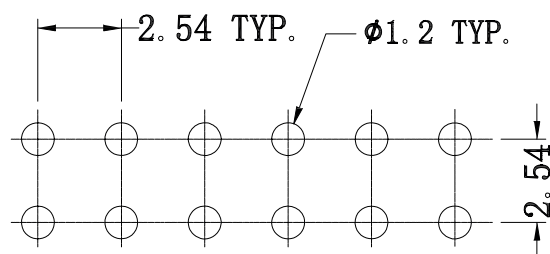


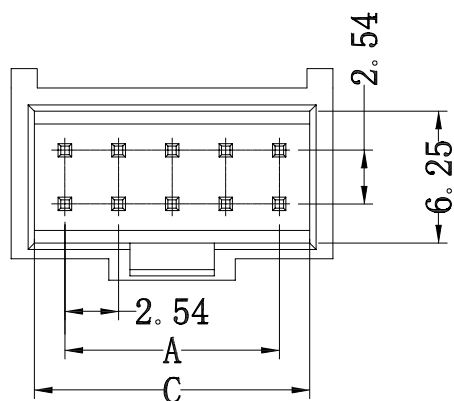

DIM D
2.50mm
2.90mm

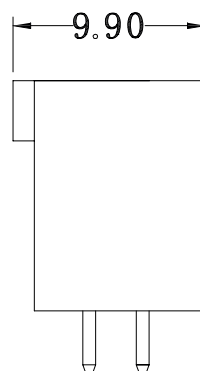

Specifications

Voltage Rating: 250V AC/ DC

Current Rating: 3A AC/DC

Withstanding Voltage: 1500V AC/Minute

Insulation Resistance: 1000MΩ Min.

Temperature Range: -25° C~+85° C

Contact Resistance: 20mΩ Max.

Pin Material: Brass/Gold-flash or Tin-plated

Material: PBT, UL94V-0


Q'ty/Bag: 1000PCS

Ordering Information & Dimensions

Poles	Dimensions (mm)		
	A	B	C
6	5.08	10.12	8.12
8	7.62	12.66	10.66
10	10.16	15.20	13.20
12	12.70	17.74	15.74
14	15.24	20.28	18.28
16	17.78	22.82	20.82
18	20.32	25.36	23.36
20	22.86	27.90	25.90
22	25.40	30.44	28.44
24	27.94	32.98	30.98
26	30.48	35.52	33.52
28	33.02	38.06	36.06
30	35.56	40.60	38.60
32	38.10	43.14	41.15
34	40.64	45.68	43.68
36	43.18	48.22	46.22
38	45.72	50.76	48.76
40	48.26	53.30	51.30

General description of ordering code

FAMILY	ROWS	N° POLES	VERSION	CLIP PLATING	DIMENSION "D"
GH254	2	XX	D [straight]	F [flash gold]	1 [2.50 mm]
				T [tin]	2 [2.90 mm]



euro-conn



UNITS: mm		SHEET SIZE: ISO A4		SCALE: ---		First angle projection
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120			
± 0.12	± 0.15	± 0.3	± 0.5			
INTERCO254						