


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

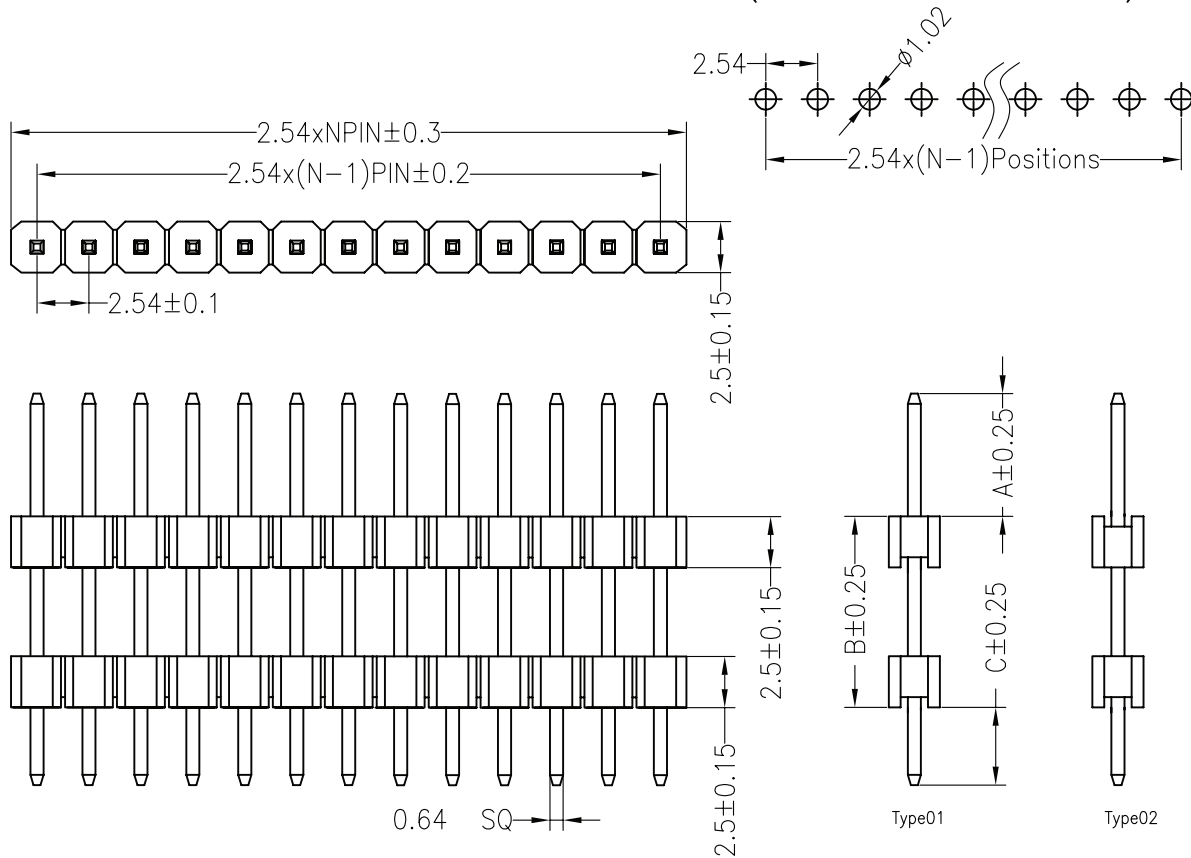

SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:20m Ω Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000M Ω Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

General description of ordering code

Dimension antitheses list			
ITEM	C	A	B
Standard	3.00	6.00	
Alternate			

FAMILY	PITCH	N° ROWS	N° PIN P.R.	VERSION	CLIP PLATING	HEIGHT	OPTION	SP_CODE	TYPE	PACKAGE
PH	254	1	XX	D [straight]	F [flash gold]	XXX [length A+B+C]	B [double insulator 2.5]	--	01	T [tube]
SP_code= Alternate custom									02	V [bag/tray]



euro-conn



US
FILE N. E356435

UNITS: mm

SHEET SIZE: ISO A4

SCALE:

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

PIN HEADER