


SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

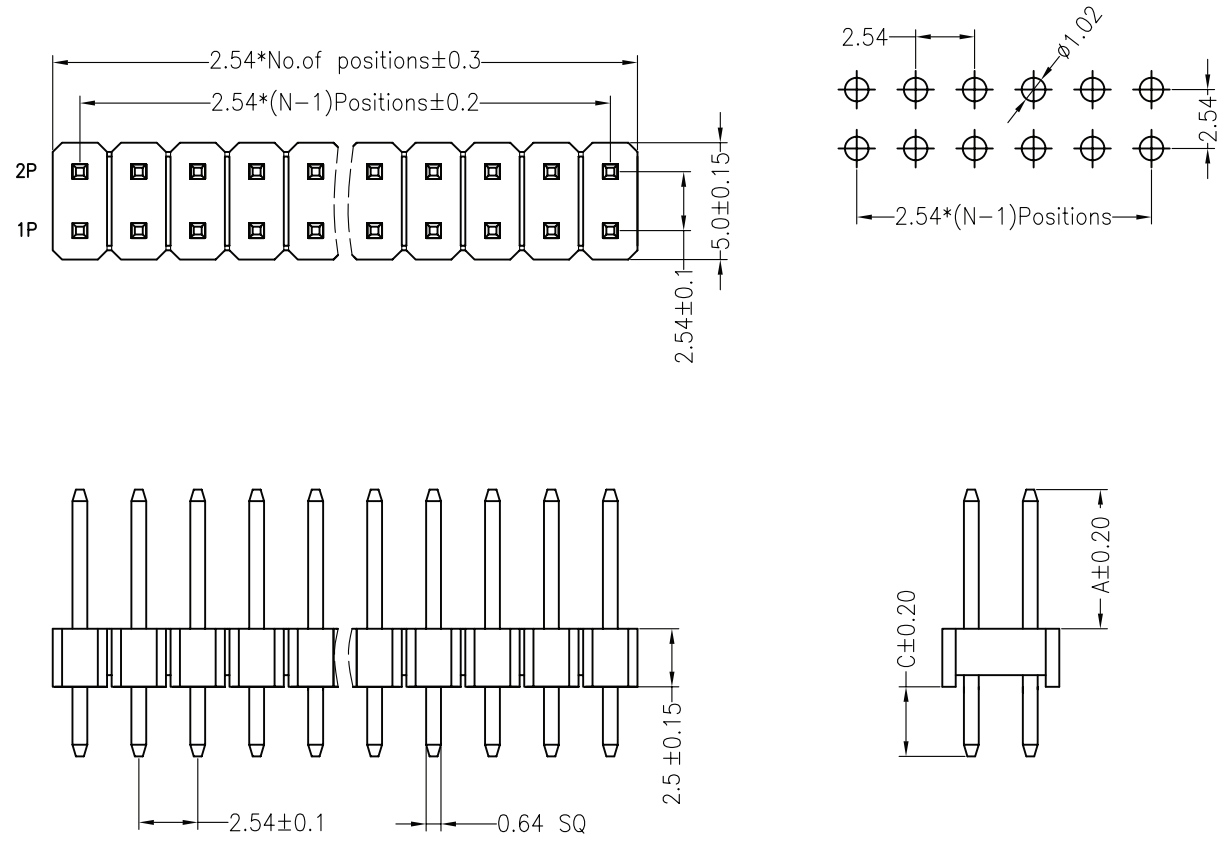

General description of ordering code

Dimension antitheses list		
ITEM	A	C
Standard	6.00	3.00
Alternate		

FAMILY	PITCH	N° ROWS	N° PIN P.R.	VERSION	CLIP PLATING	HEIGHT	OPTION	SP_code*	TYPE	PACKAGE
PH	254	2	XX	D [straight]	F [flash gold] C [gold 5u] G [gold 10u]	XXX [length A+C+2,5]	A [insulator 2,5]	--	00	T [tube] V [bag/tray]

*SP_code=Alternate custom