
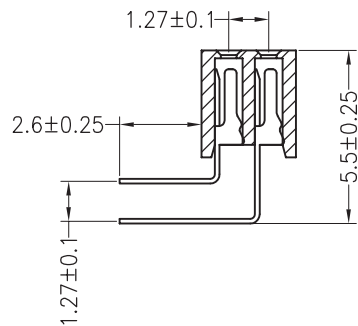
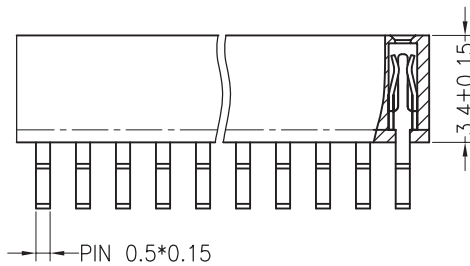
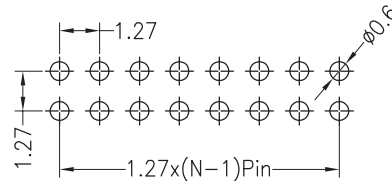


**SPECIFICATIONS**

Rated Current:1.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

**Recommended P.C.B Layout(Top Side)**  
 (PCB BOARD TOLERANCE±0.05)

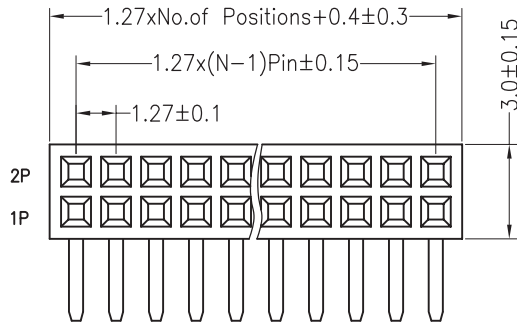

FAMILY	PITCH	N° ROWS	N° PIN P.R.	VERSION	CLIP PLATING	HEIGHT	OPTION	PACKAGE
<b>FH</b>	<b>127</b>	<b>2</b>	<b>XX</b>	<b>R</b> [right angle]	<b>F</b> [flash gold]	<b>034</b>	<b>00</b> [Standard]	<b>T</b> [tube]
					<b>G</b> [15u gold]			<b>V</b> [tray]



**euro-conn**



**CALUS**  
 FILE N. E356435

**UNITS:** mm

**SHEET SIZE:** ISO A4

**SCALE:**

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

**HEADER**