


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

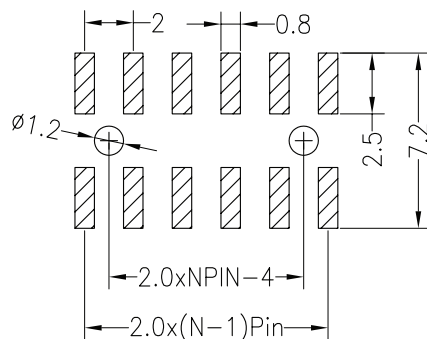

SPECIFICATIONS

Rated Current:2.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass




Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds

(260°C for 10 seconds)

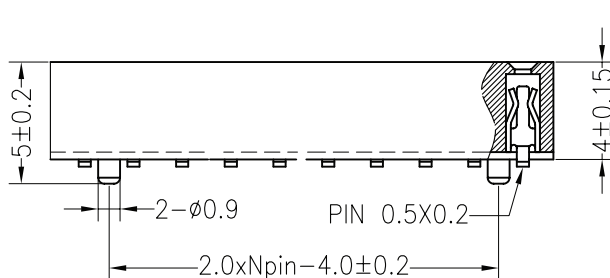

0 = W/O Post

S = With Post

FAMILY	PITCH	N° ROWS	N° PIN P.R.	VERSION	CLIP PLATING	HEIGHT	OPTION	PACKAGE	SPECIAL
FH	200	2	XX	M [SMD straight]	F [flash gold]	043	00 [Standard]	T [tube]	0 [without PEG]
					G [15u gold]			R [reel]	S [whit PEG]



euro-conn



CALUS
FILE N. E356435

UNITS: mm

SHEET SIZE: ISO A4

SCALE:



First angle projection

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

HEADER