
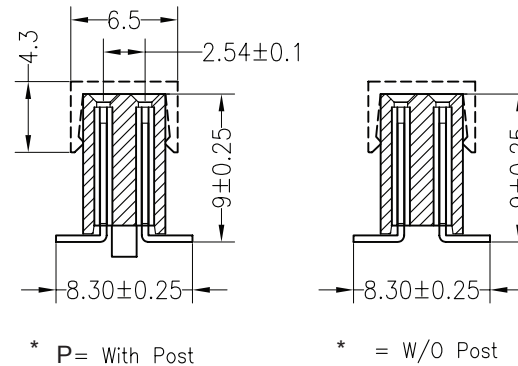
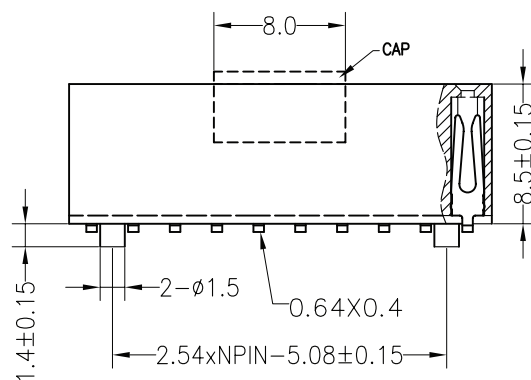


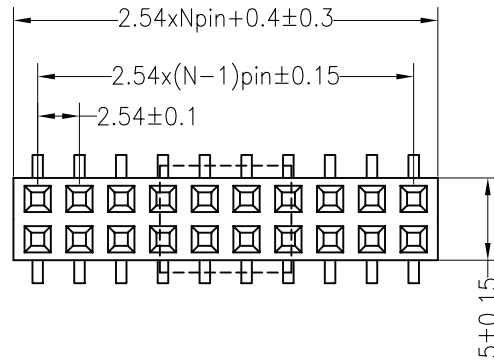

* = W/O Post

Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Max.Processing Temp: 230°C for 30–60 seconds
(260°C for 10 seconds)

FAMILY	PITCH	N° ROWS	N° PIN P.R.	VERSION	CLIP PLATING	HEIGHT	OPTION	PACKAGE	*SPECIAL
FH	254	2	XX	M [smt straight]	F [flash gold]	085	00 [standard]	T [tube]	P [peg]
					C [gold 5u']			P [tube+ caps]	
					D [gold 10u']			W [reel+caps]	
					G [gold 15u']			V [tray]	



euro-conn



First angle projection

FEMALE HEADER

± 0.5