

SPECIFICATIONS

Rated Current:2.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:400V AC/DC

Insulation Resistance:800MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass





Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

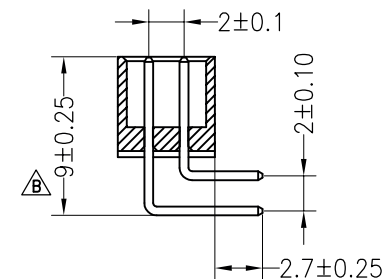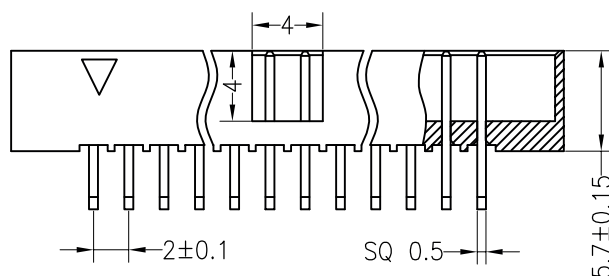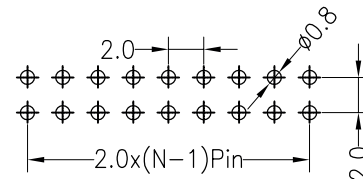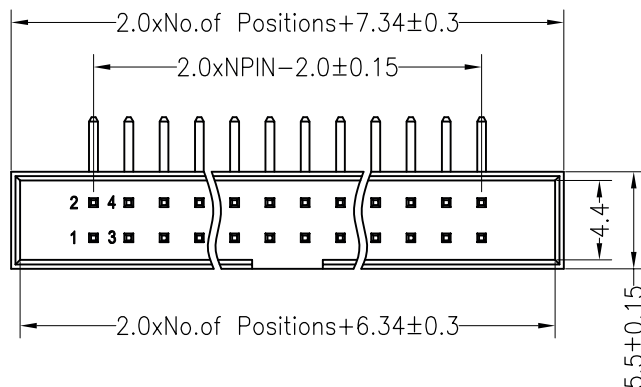

General description of ordering code

FAMILY	PITCH	N° PIN	VERSION	PLATING	OPTION	OPTION1	COLOR	PACKAGE
IDM	200	XX	R [right angle]	F [gold flash]	0 [Standard]	0 [Standard]	B [black]	V [tray]



euro-conn



RoHS
Compliant
Lead Free

UL
US
FILE N. E356435

UNITS: mm

SHEET SIZE: ISO A4

SCALE:

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

IDC SYSTEM