

Electrical Characteristics:

Current Rating: 1 AMP

Insulator Resistance: 1000M Ohm min. at DC 250V

Contact Resistance: 20m Ohm max. at DC 100mA

Operating Temperature: -45°C~+105°C

Material:





Housing: PBT UL94V-0

Contacts: Brass


Plating: Selective gold plated: gold plated on mating area and Nickel plated on wire cutting area

Gold plated: 3u" over 50u" nickel

Cable: 1.27mm (0.050") pitch flat cable

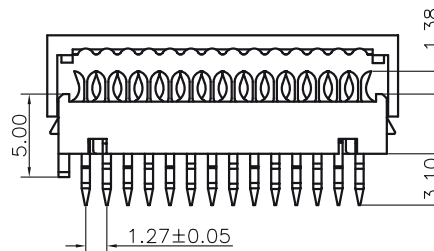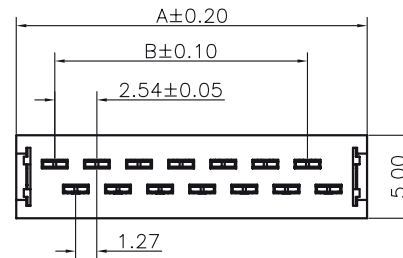

Part No.	Dimension	
	A	B
04	8.45	2.54
06	10.99	5.08
08	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86
22	31.31	25.40
24	33.85	27.94
26	36.39	30.48

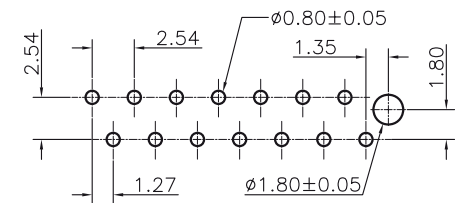

PCB Layout

General description of ordering code

FAMILY	MODEL	N° PIN	VERSION	PLATING	OPTION	OPTION1
MT	P	-	XX	V [jdc dip]	T [tin]	0 [Standard]
					0 [Standard]	0 [Standard]



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 10:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

MINI-MATCH