


SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Phosphor Bronze
 Contact Plating:Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA46
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

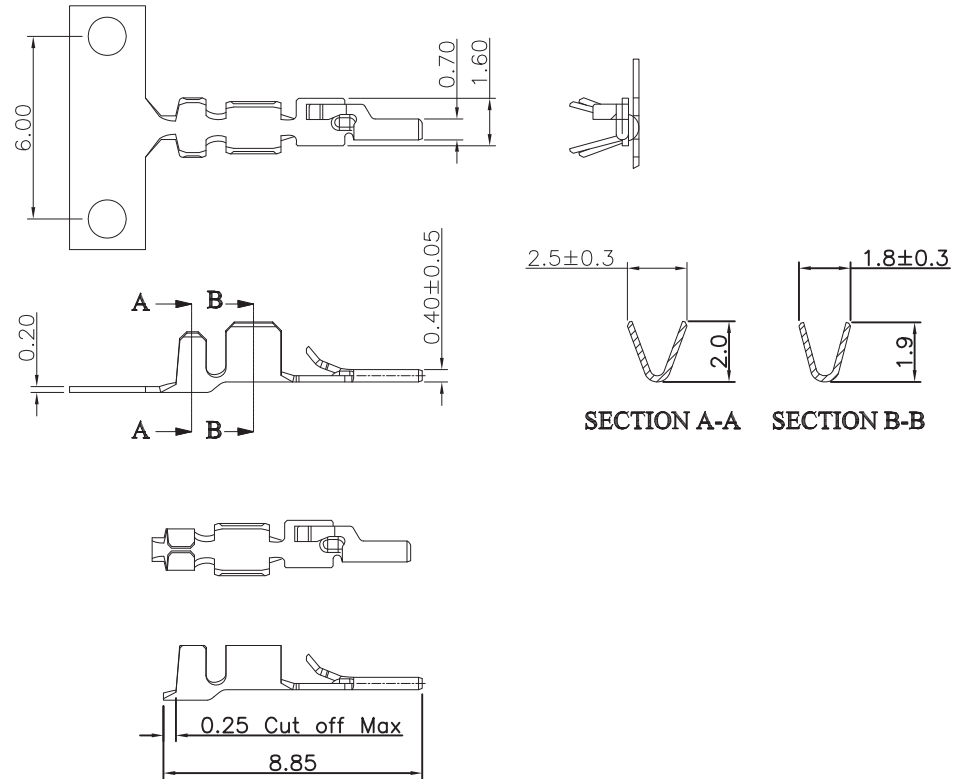

General description of ordering code

FAMILY	MODEL	VERSION	PLATING
MT	T [terminal]	M [male]	T [tin]



euro-conn



UNITS: mm		SHEET SIZE: ISO A4		SCALE: 10:1	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120		
± 0.12	± 0.15	± 0.3	± 0.5		

! I prodotti e le caratteristiche possono cambiare senza preavviso.
 The products and their features may change without notice.

MINI-MATCH