


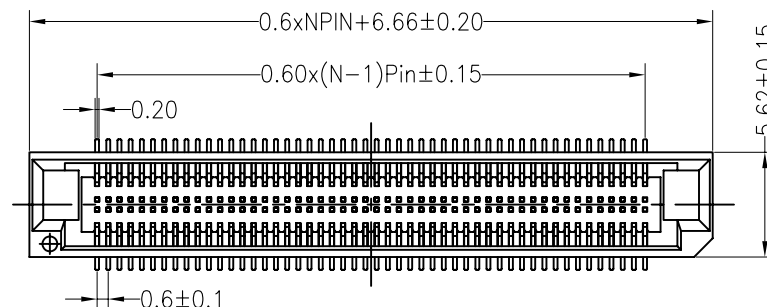
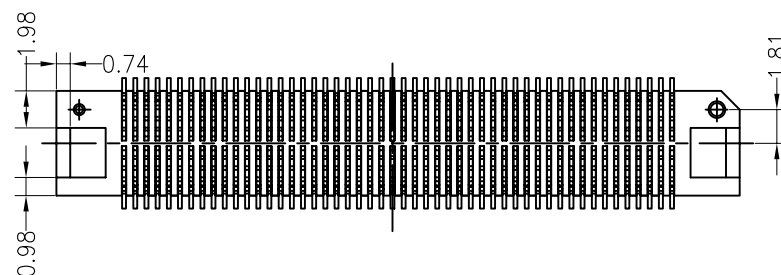


SPECIFICATIONS


Electical Rating: AC/DC 50V 0.5A
 Insulation Resistance: 500M Ω
 Withstang Volt: 200V AC/minute
 Opratng Temperature: -40°to+105°
 Material
 Contact: Phosphor Bronze Gold-Plated
 Housing: LCP



ASSEMBLY

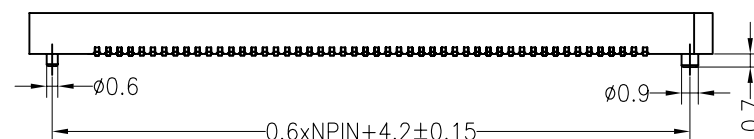


Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE $\pm$ 0.05)

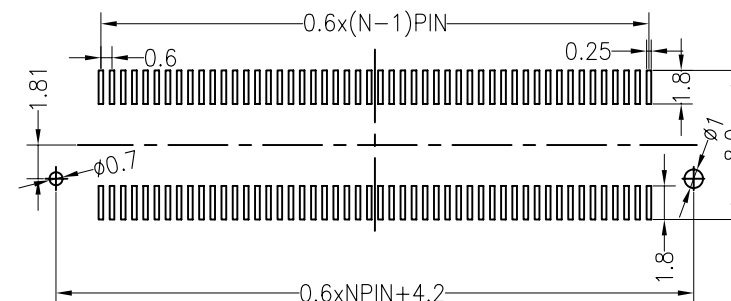

General description of ordering code

FAMILY	PITCH	N° PIN	VERSION	MODEL	PLATING	HEIGHT	PEG	PACKAGE
STS	060	XXX	M	S [Socket]	G [gold flash] C [gold 5u'] M [gold 15u']	022	P [with PEG]	T [tube] R [reel+cap]

No Pins 60 =060
 80 =080
 100 =100



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE:



First angle projection

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

$\pm$ 0.12

$\pm$ 0.15

$\pm$ 0.3

$\pm$ 0.5

BOARD TO BOARD