

Technical Data

Insulator:Black glass filled polyester PPS or PBT

Flammability:UL 94V-0

Sleeve:Brass

Contact clip(4 finger):Beryllium copper

Mating pin:Ø0.40 to Ø0.56mm

Forces:(polished steel gauge Ø0.43)

Mechanical life:min 500 cycles




Current rating:3Amps/Contact max

Contact resistance:max 10mΩ

Dielectric strength:min 1000VRMS

Operating temperature:-55°Cto+105°C

Soldering temperature:+245°C±5°C, 5s max

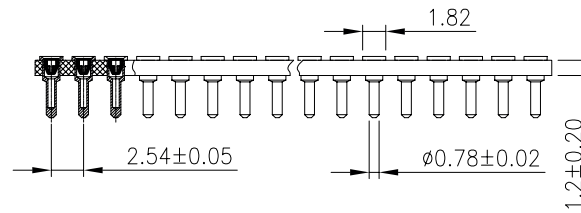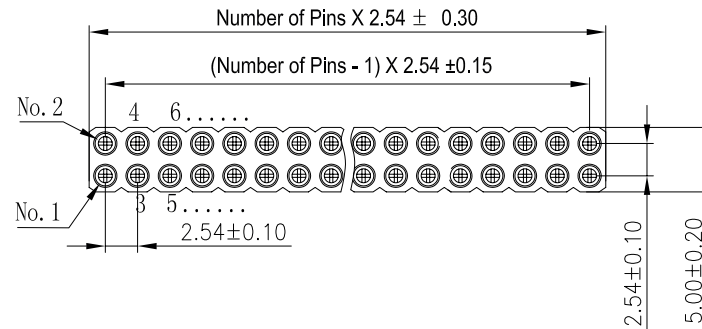

General description of ordering code

FAMILY	TYPE	N° PIN	VERSION	CLIP PLATING	PACKAGE	SPECIAL
ZH	D [double rows]	XX [1 ≤ XX ≤ 40]	D	F [flash gold]	T [tube] V [tray]	12 [low profile]



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE:---

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

IC-SOCKET