
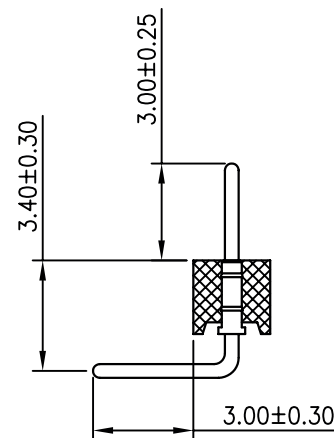
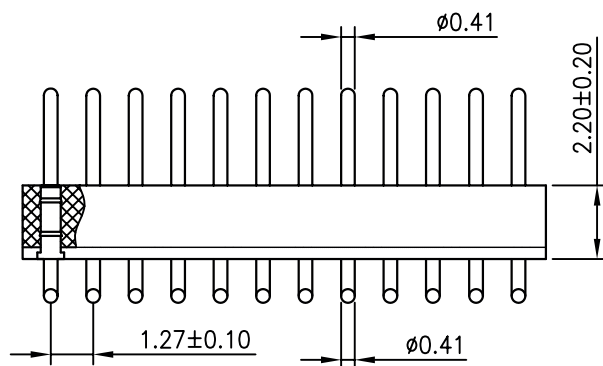


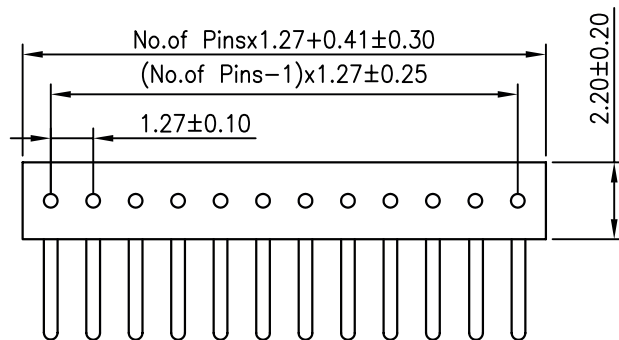

TECHNICAL SPECS:

Current Rating: 1.0AMP

Contact Resistance: 10mΩ Max

Dielectric Strength: Min 1000V_{RMS}

Mechanical Life: Min 500 cycles

Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000)

Contact plating: Au over Ni

Connecting Pin: Ø0.41mm

Insulator Material: PPS+30%G.F(UL94V-0)

General description of ordering code

FAMILY	PITCH	N°. ROWS	N° PIN	VERSION	CLIP PLATING	PIN LENGHT	PIN DIAMETER	PACKAGE
ZM	B [1,27mm]	1	XX	R	F [flash gold]	030	F [0,41 / 0,41 mm]	T [tube]
					T [tin]			V [tray]
					G [15u gold]			



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE: ----

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

MACHINE HEADER