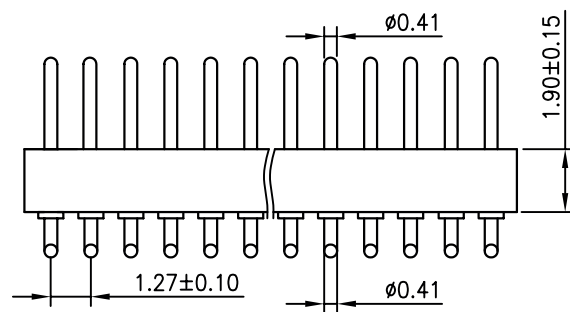
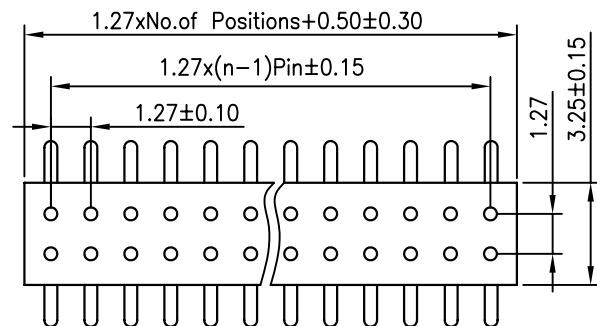


TECHNICAL SPECS:

Current Rating:1.0AMP

Contact Resistance:10mΩ Max

Dielectric Strength: Min 1000V_{RMS}

Mechanical Life: Min 500 cycles

Operation Temperature:-40°C to +105°C

Sleeve:Brass CuZn36Pb3(C36000)

Contact plating:Au over Ni

Connecting Pin:Ø0.41mm

Insulator Material:PPS+30%G.F(UL94V-0)

General description of ordering code

FAMILY	PITCH	N°. ROWS	N° PIN	VERSION	CLIP PLATING	PIN LENGHT	PIN DIAMETER	PACKAGE
ZM	B (1,27mm)	2	XX	M	F [flash gold]	030	F [0,41 / 0,41 mm]	T [tube]
					T [tin]			V [tray]
					G [15u gold]			



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE: ----

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

MACHINE HEADER