



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

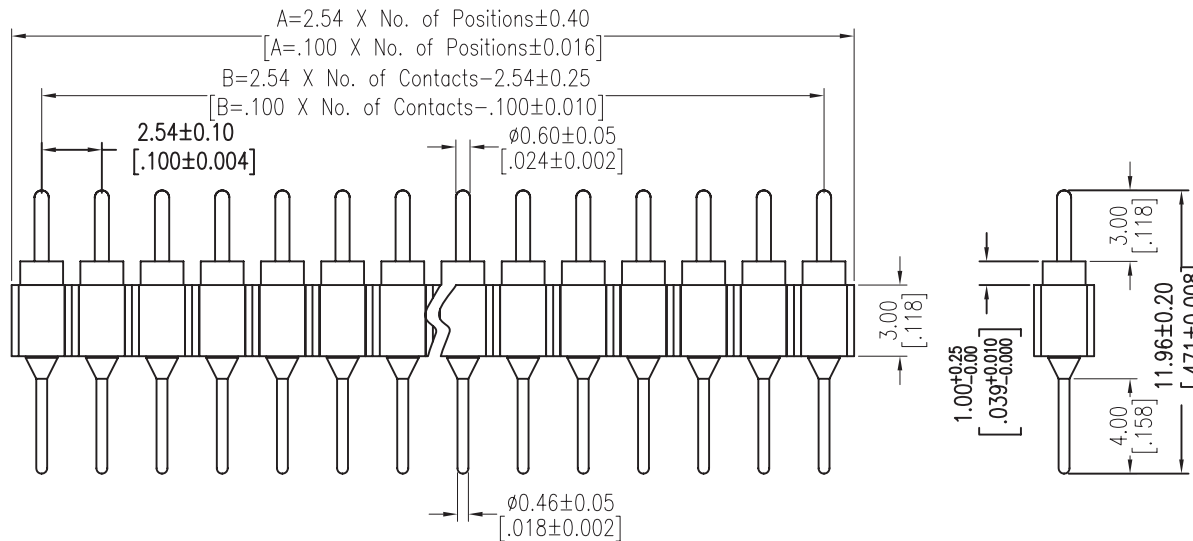

TECHNICAL SPECS:

Current Rating: 3.0AMP

Contact Resistance: 10m Ω Max

Dielectric Strength: Min 1000V_{RMS}

Mechanical Life: Min 500 cycles

Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000)

Contact plating: Au over Ni

Connecting Pin: $\phi 0.47$ mm

Insulator Material: PPS+30%G.F(UL94V-0)

General description of ordering code

FAMILY	TYPE	N° ROW	N° PIN PER ROW	VERSION	CLIP PLATING	PIN LENGHT	PIN DIAMETER	PACKAGE
ZM	0 [single row 2,54]	1	XX [1 ≤ XX ≤ 36]	D [straight]	F [flash gold]	119 [total lenght]	D [0,60/0,50mm]	T [tube]

T [tin]



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE: ----

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

MACHINE HEADER