
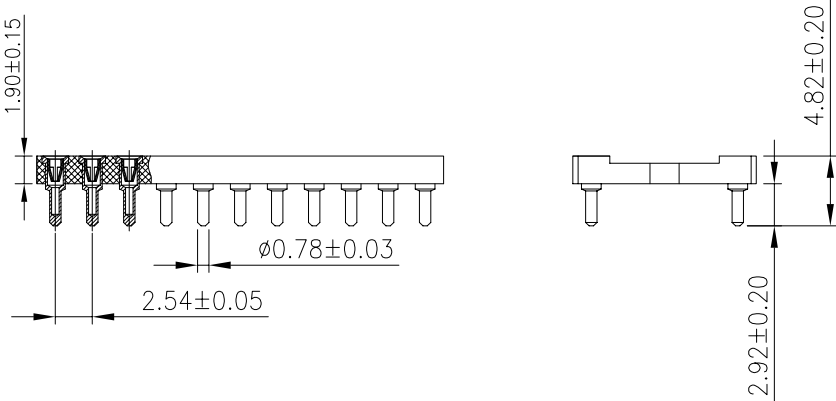


Technical Specs:

Insulator: Black glass filled polyester PBT-GF30-FR
Flammability: UL 94V-O
Sleeve: Brass
Contact clip(4/6 finger): Beryllium copper(C17200)
Accepted pin: Ø0.38 to 0.56mm
Forces: (polished steel gauge Ø0.43mm)
--Insertion 2 N typ
--Withdrawal 1 N typ
Mechanical life: min500 cycles
Rated current: 3A
Contact resistance: max 10mΩ
Dielectric resistance: Min 1000MΩ

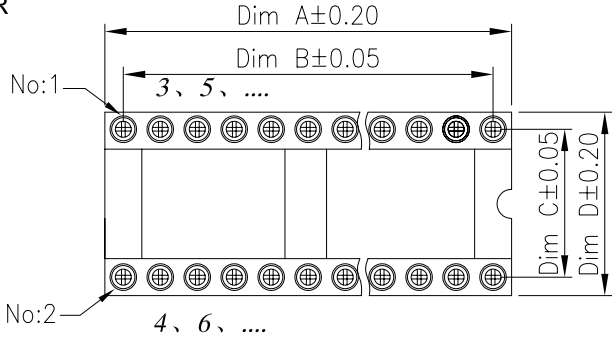

Contact	Dim A	Dim B	Dim C	Dim D
4	5.08	2.54	7.62	10.16
6	7.62	5.08	7.62	10.16
8	10.16	7.62	7.62	10.16
10	12.70	10.16	7.62	10.16
14	17.78	15.24	7.62	10.16
16	20.32	17.78	7.62	10.16
18	22.86	20.32	7.62	10.16
20	25.40	22.86	7.62	10.16
24	30.48	27.94	7.62	10.16
28	35.56	33.02	7.62	10.16
16	20.32	17.78	10.16	12.70
20	25.40	22.86	10.16	12.70
22	27.94	25.40	10.16	12.70
24	30.48	27.94	10.16	12.70
28	35.56	33.02	10.16	12.70
24	30.48	27.94	15.24	17.78
28	35.56	33.02	15.24	17.78
32	40.64	38.10	15.24	17.78
36	45.72	43.18	15.24	17.78
40	50.80	48.26	15.24	17.78

General description of ordering code


FAMILY	TYPE	N° PIN	VERSION	CLIP PLATING	PACKAGE	SPECIAL
ZH	1 [double row 7,62] 2 [double row 10,16] 3 [double row 15,24]	XX [4 ≤ XX ≤ 40]	D	F [flash gold] T [tin]	T [tube] V [tray]	R [low profile]



euro-conn



UNITS: mm		SHEET SIZE: ISO A4		SCALE:---
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120	
± 0.12	± 0.15	± 0.3	± 0.5	



IC-SOCKET