



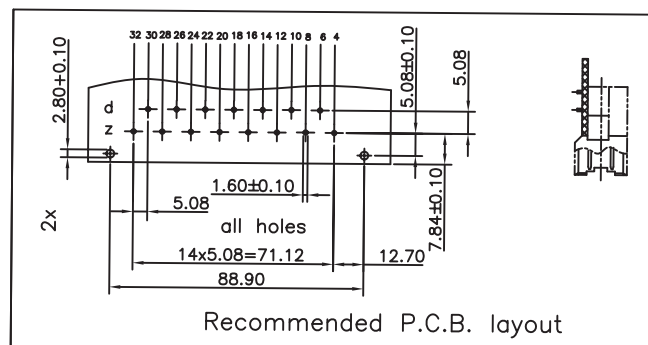

Specification

Housing: PBT & 30% Glass Fiber (UL94V-0)
 Contact: Female: Phosphor Bronze
 Plating: Ag/Ni plated
 Operating temperature: -55°C ~ +105°C
 Contact resistance: 8m(ohm) max.
 Insulator resistance: 10⁹M(ohm) min.
 Current rating: 15 AMP
 Withstanding voltage: AC 3100V for 1 minute
 Insertion force: 90N max
 Withdrawal force: 0.2N/pin min

Contact arrangement
 View from termination side

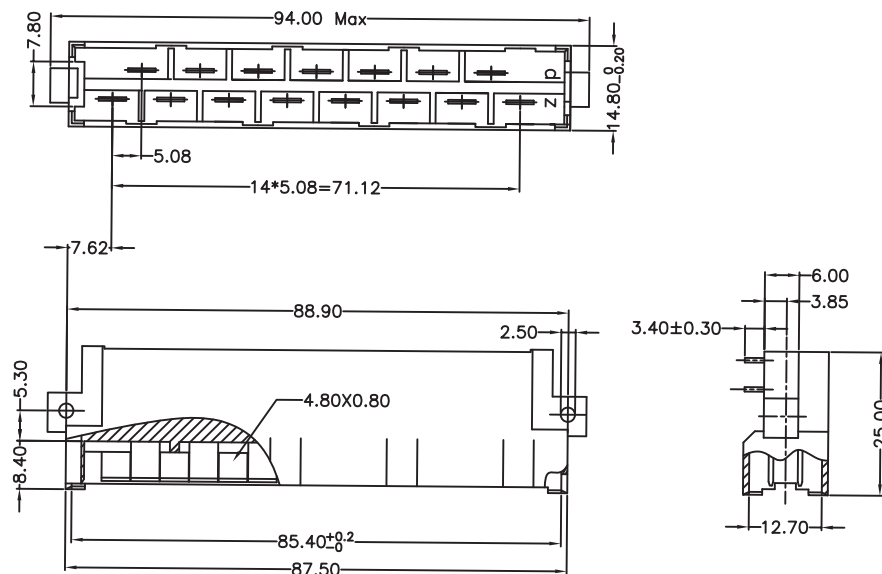

General description of ordering code

FAMILY	Part Number	VERSION	MODEL	CLIP PLATING	PACKAGE
EC612	- 0015	M	R [right angle]	AG [silver/nickel]	T [tube]
					V [tray]



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE: ----

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
 The products and their features may change without notice.

DIN 41612