
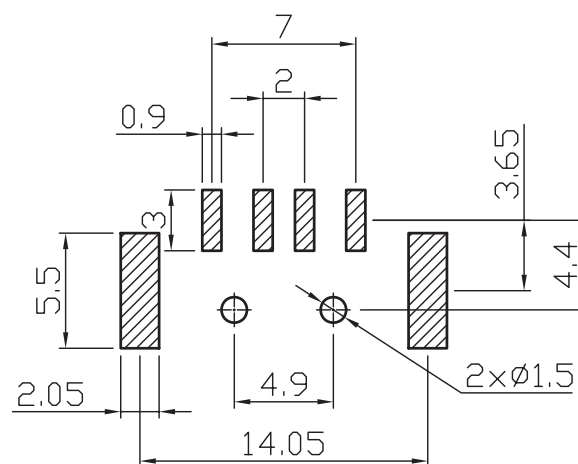
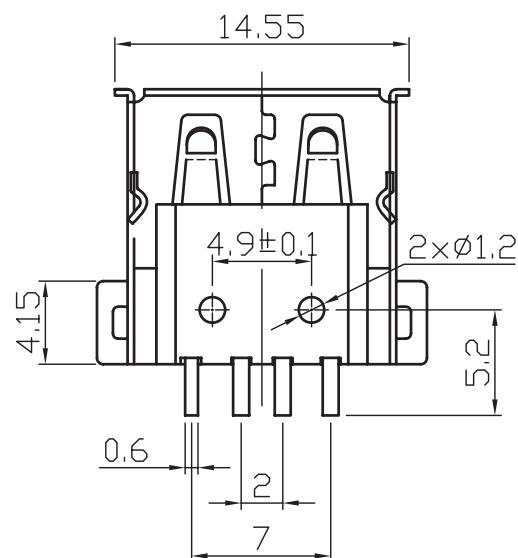
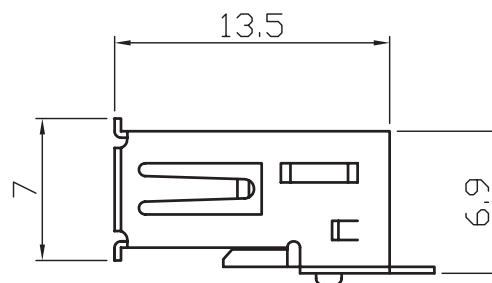


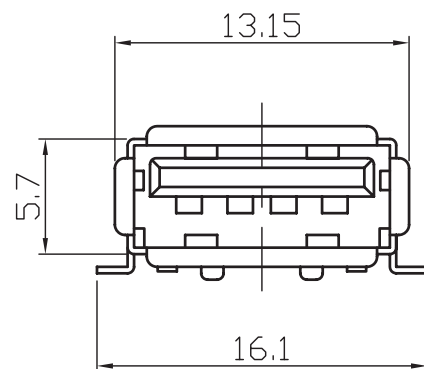

Electrical Characteristics:
 Current Rating: 1 AMP
 Insulator Resistance: 1000M Ω hm min.
 at 500 VDC
 Dielectric Withstanding Voltage: 500
 VAC / Minute
 Contact Resistance: 30m Ω hm max.
 Temperature: -55°C ~ +105°C 电气性能:

Material:
 Housing: 30% Glass filled PBT/LCP
 Contacts: C2680
 Shell: SPCC

Plating:
 Terminals: gold-plated contact
 region 1u" welding area is plated
 with bright Tin 100-200u "
 Housing: a region-wide nickel-plated
 50-80u "

PN: USB-A04NFFNE



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE:

! I prodotti e le caratteristiche possono cambiare senza preavviso.
 The products and their features may change without notice.

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

USB 2.0