

ELECTRICAL:





1. VOLTAGE RATING :125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMSMAX
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500 NDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 50Hz or 60Hz, 1MIN.

MECHANICAL:

1. HOUSING & INSERT MATERIAL : PBT UL94V-0.
2. CONTACT MATERIAL : DIAMETER 0.45MM PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
3. SHIELD : 0.20~0.25MM THICKNESS BRASS WITH NI PLATED.
4. MATING/UNMATING FORCE : 2.2KG. F MAX.
5. RETENTION STRENGTH : 7.7KG. F MIN BETWEEN JACK AND PLUG.
6. OPERATING LIFE : 600 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE : -10°C ~+40°C REATIVE HUMIDITY<70%
2. OPERATION : -40°C ~+85°C

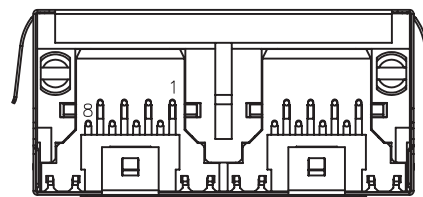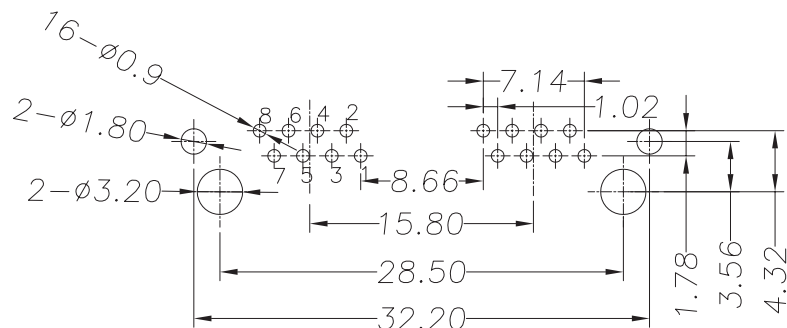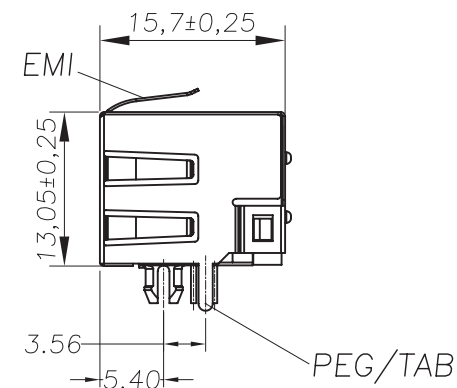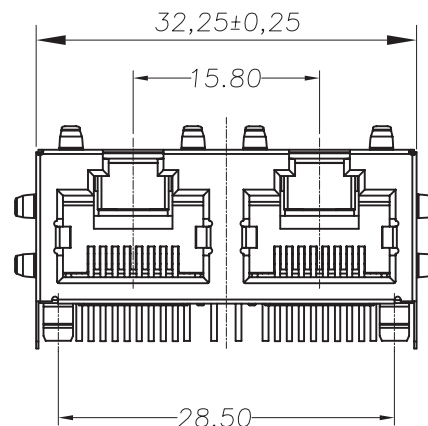

PC Board Layout

General description of ordering code

FAMILY	POSITIONS	CONTACTS	VERSION	HEIGHT	CLIP PLATING	PORTS	OPTION
MJS	8	8	AR [right angle]	E [mm 13,1]	F [flash gold]	02 [1X2]	W [front shield]
					S [gold 6u]		
					G [gold 15u]		



euro-conn



UNITS: mm

> 0 ~ 3

± 0.12

> 3 ~ 18

> 18 ~ 50

± 0.15

SHEET SIZE: ISO A4

SCALE:

> 50 ~ 120

± 0.3

Rev. n.
xx/xx/xxxx

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

MODULAR