

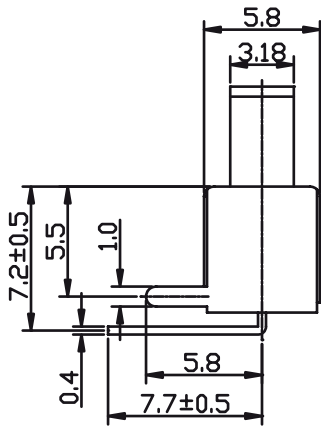
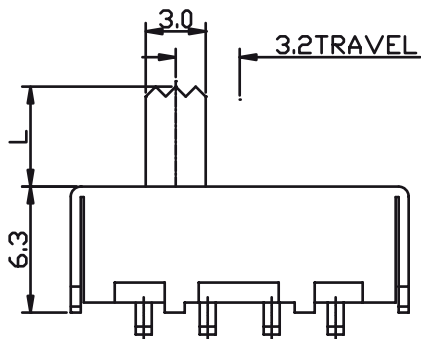


SPECIFICATIONS

Rating: 0.3A 50VDC
Contact Resistance: 50MΩ max
Insulation Resistance:500VDC 100MΩ Min
Dielectric Strength:100V AC 1 Minute
Operating Force:100gf~800gf
Electrical Life :10,000 cycles

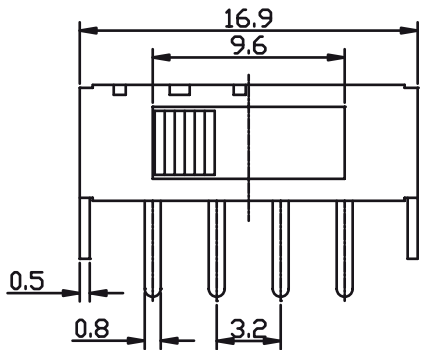

SCHEMATIC

Travelling						
C	D	E	F	G	H	
1.5	2.0	2.5	3.0	3.5	4.0	
I	J	K	L	N	P	
4.5	5.0	5.5	6.0	7.0	8.0	

Knob Type					
RG	G	TG	VG	EG	CG

General description of ordering code

FAMILY	MODEL	POLE/TROW	TRAVELLING	SEQUENTIAL NO.	Knob TYPE	
EC7	-	SS10	13	F	24	RG

(1P3T) Slide Switch Series



euro-conn



UNITS: mm		SHEET SIZE: ISO A4		SCALE: ----	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120		
± 0.12	± 0.15	± 0.3	± 0.5		

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

SWITCHES