



Electrical performance:

Rating: 50mA. 12V DC
 Insulation resistance: 100MΩ min. 100V DC
 Dielectric strength: 250V AC for 1 min.
 Contact resistance: 100mΩ max.
 Operating Temperature Range: -30°C to +85°C
 Durability:
 Lifetime: 50000 Cycles



Mechanical performance:

Operating force: 250gf
 Travel: 0.25±0.1mm


* THE DIMENSION OF CARRIER TAPE, COVER TAPE AND REEL *

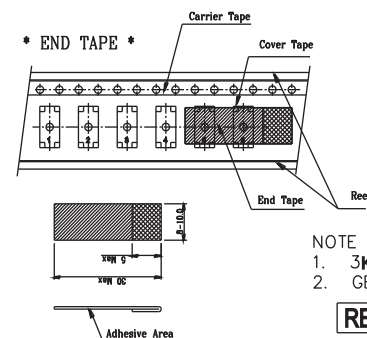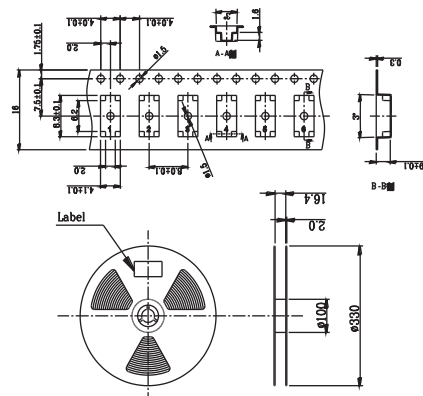

* THE SPECIFICATION FOR PACKAGING *

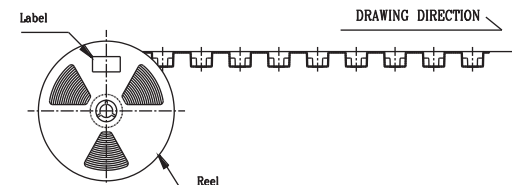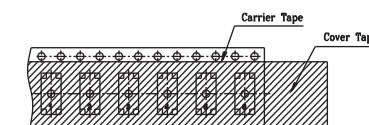

* THE SPECIFICATION FOR PACKAGING *

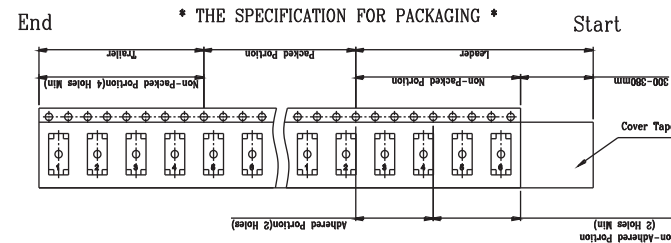

- NOTE
- 3K pcs SWITCHES PER 1 REEL
 - GENERAL TOLERANCE : 0.2mm

REFERENCE DR

General description of ordering code

FAMILY		SIZE	HEIGHT	FORCE	OPTION
ECTS	-	4601	06	250 [qf]	R

3.8x6.0 Normal Closed Type Tact Switchs



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE:

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
 The products and their features may change without notice.

TACT SWITCH