

Material:

Housing: PBT

Contacts: Phosphor Bronze, Tinning




Electrical Characteristics:

Insulator Resistance: 1000M Ohm min.



Contact Resistance: 30m Ohm max.

Dielectric voltage: 500V AC

Operating Temperature: -25°C~+85°C

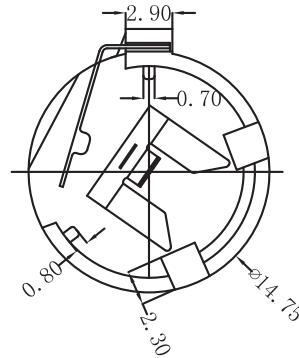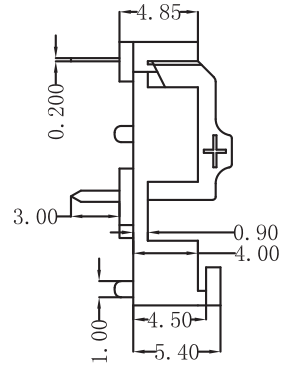

PCB Layout Diagram
Top View

**General description of ordering code**

FAMILY	MODEL	SIZE	TYPE
BS12	- CR	1220	01

CR1220 Coin Battery Holder**euro-conn**

UNITS: mm

SHEET SIZE: ISO A4

SCALE: ----

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

! I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

COIN CELL HOLDER