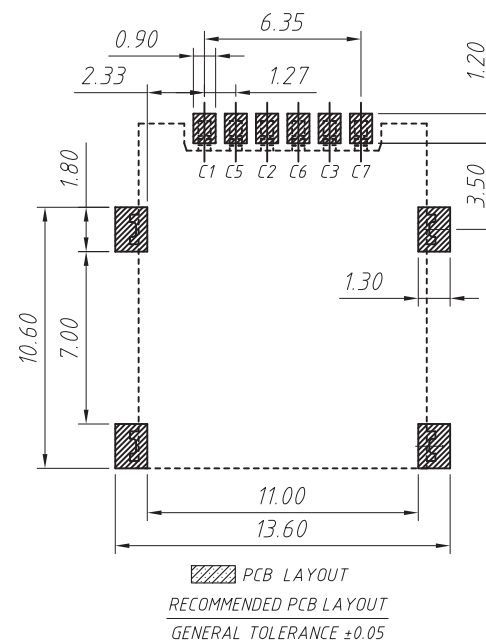
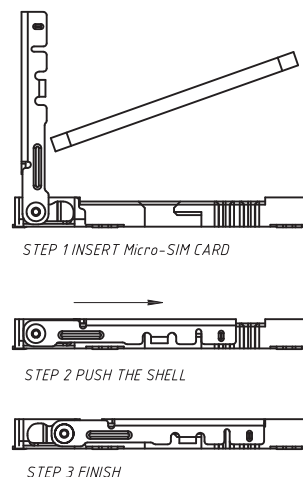

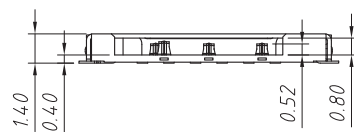
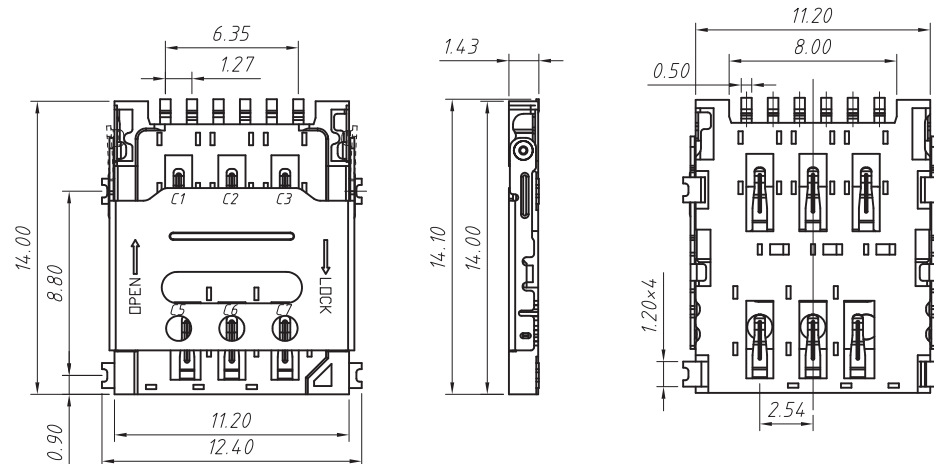


Material:

Insulator: High Temperature

Thermoplastic, UL 94 V-0.

Contact: C5210, Plated 50u" Ni

Overall Contact All Au 1U.

Shell: SUS. All Ni 30U/MIN.

Electrical:

Current Rating: 0.5A

Voltage Rating: 5V AC/DC

Ambient Temperature Range: -40°C ~ +85°C

Storage Temperature Range: -40°C ~ +85°C

Ambient Humidity Range: 95% R.H. Max.

Contact Resistance: 80mΩ Max.

Insulation Resistance: 100MΩ Min./100V DC

Mating Cycles: 10000 Insertions.


Reflow peak temp: 260°C ±5°C, 3 ~ 5 s

SIM Card

Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

General description of ordering code

FAMILY	N° PIN	TYPE
SCM12	06	A077



euro-conn



UNITS: mm

SHEET SIZE: ISO A4

SCALE: ----

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

I prodotti e le caratteristiche possono cambiare senza preavviso.
The products and their features may change without notice.

NANO SIM CARD